

- Top is 1.5" solid foamed stainless steel.
- Self-contained capillary tube system using environmentally friendly CFC free refrigerant (R290).
- Front accessible condensing unit for easy cleaning and maintenance.
- Front breathing.
- Easy to mount casters (two lockable) are standard with all units.
- Electronic thermostat with digital LED display for accurate control located behind front access panel.
- Each door is equipped with magnetic gaskets that are removable for cleaning.
- 24" depth conserves important work space.
- Interior LED lighting.
- Bright stainless steel interior.
- Exterior cabinet construction consists of black powder coated steel front and sides.
- Tested to NSF Standard 7 requirements for open food storage.
- Full two year parts and labor warranty and a five year compressor warranty.

**ABB48**



**ABB60**



**ABB72**



**Optional larger 5.75" casters available (#67000K) Set of four.**

Model Number	External Dimensions			Doors	Temperature Range	Cord Length	12 oz. Cans	Amps	HP	NEMA Plug	Crated Weight (lbs.)
	Width	Depth	Height*								
<b>ABB48</b>	49.125"	24.0"	39.625"	2	33°F to 41°F	7'	48 6-pk	6	1/3	5-15P	280
<b>ABB60</b>	61.125"	24.0"	39.625"	2	33°F to 41°F	7'	72 6-pk	6	1/3	5-15P	320
<b>ABB72</b>	73.125"	24.0"	39.625"	3	33°F to 41°F	7'	84 6-pk	6	1/3	5-15P	360




\*Height includes 3.375" for casters

**PHONE** 952-941-2270  
**FAX** 952-941-3066  
**WEB** www.arcticairco.com



# DIMENSIONAL DRAWINGS

Specifications subject to change without notice.

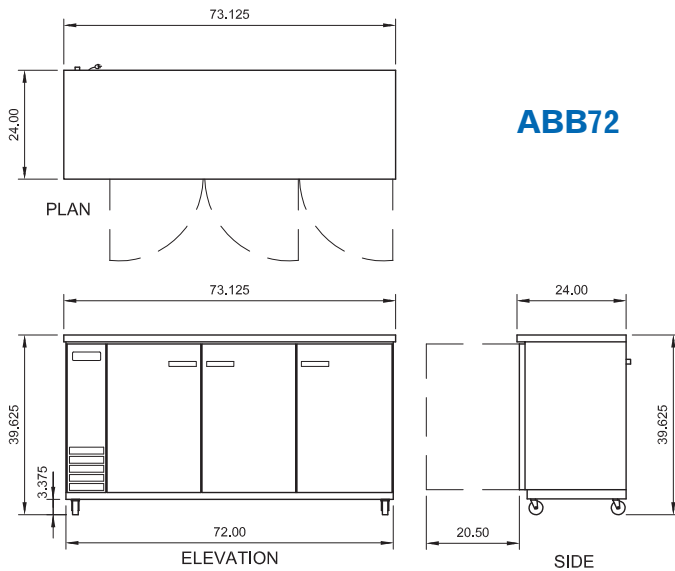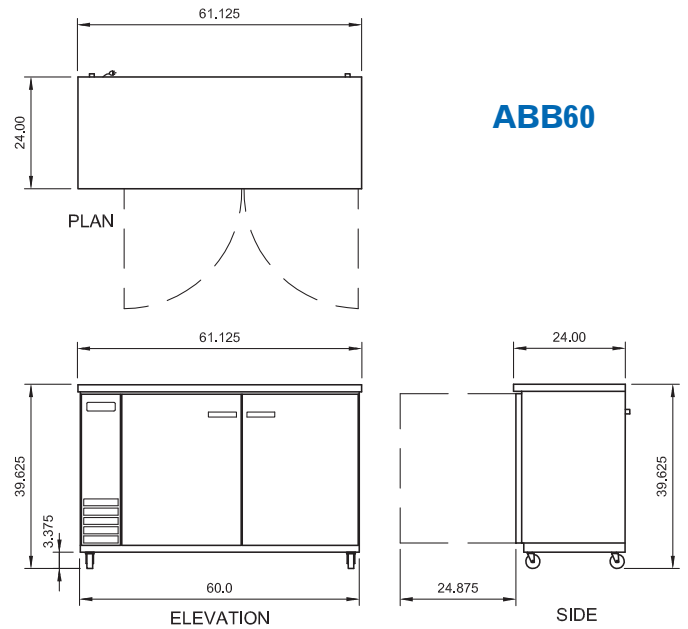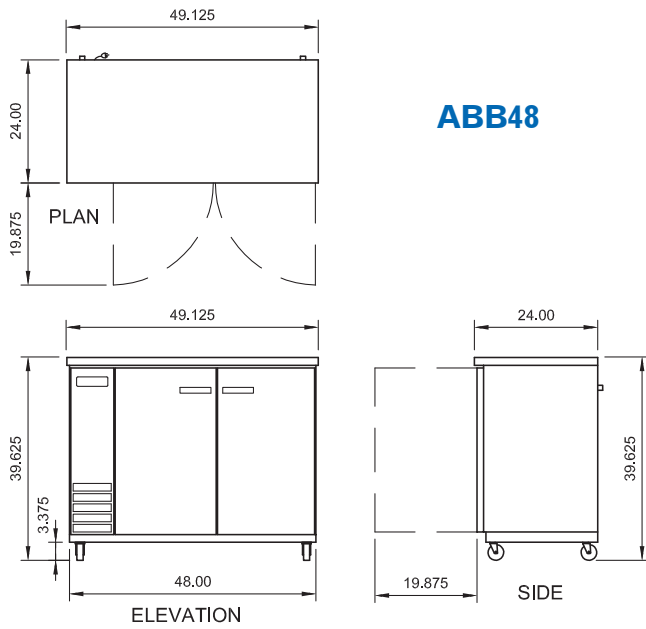

**ARCTIC AIR® — A Division of Broich Enterprises, Inc. — An American Company since 1995**

