

- All models standard with two towers and two faucets per tower.
- Top is 1.5" solid foamed stainless steel.
- Electronic thermostat with digital LED display for accurate control located behind front access panel.
- Self-contained capillary tube system using environmentally friendly CFC free refrigerant (R290).
- Front breathing.
- Front accessible condensing unit for easy cleaning and maintenance.
- Reinforced stainless steel floor.
- External drain mount.
- Easy to mount 3.25" casters (two lockable) are standard with all units.
- Mounted 4-way air distributor.
- Interior LED lighting.
- Bright stainless steel interior.
- 24" depth conserves important work space.
- Each door is equipped with locks and magnetic gaskets that are removable for cleaning.
- Exterior cabinet construction consists of black powder coated steel front and sides.
- Tested to NSF Standard 7.
- Full two year parts and labor warranty and a five year compressor warranty.



ADD48R-2



ADD60R-2



ADD72R-2

All models include internal air and liquid hoses (keg couplers, gauges and CO2 tanks supplied by others)

Optional larger 5.75" casters available (#67000K) Set of four.

Model Number	External Dimensions			Doors	Temperature Range	Cord Length	Amps	HP	NEMA Plug	Crated Weight (lbs.)
	Width	Depth	Height*							
ADD48R-2	49.0"	24.0"	39.5"	2	33°F to 41°F	7'	6	1/3	5-15P	290
ADD60R-2	61.0"	24.0"	39.5"	2	33°F to 41°F	7'	6	1/3	5-15P	325
ADD72R-2	73.0"	24.0"	39.5"	3	33°F to 41°F	7'	6	1/3	5-15P	375




*Height includes 3.25" for casters

PHONE 952-941-2270
FAX 952-941-3066
WEB www.arcticairco.com



DIMENSIONAL DRAWINGS

Specifications subject to change without notice.

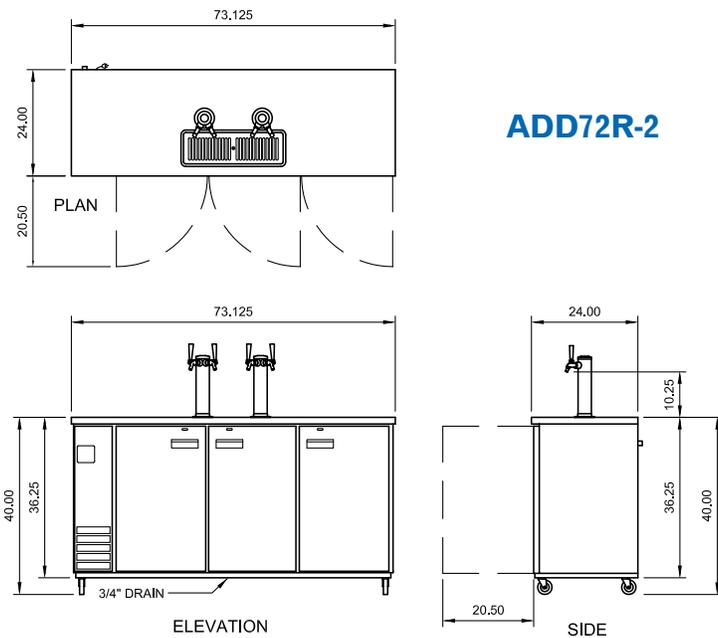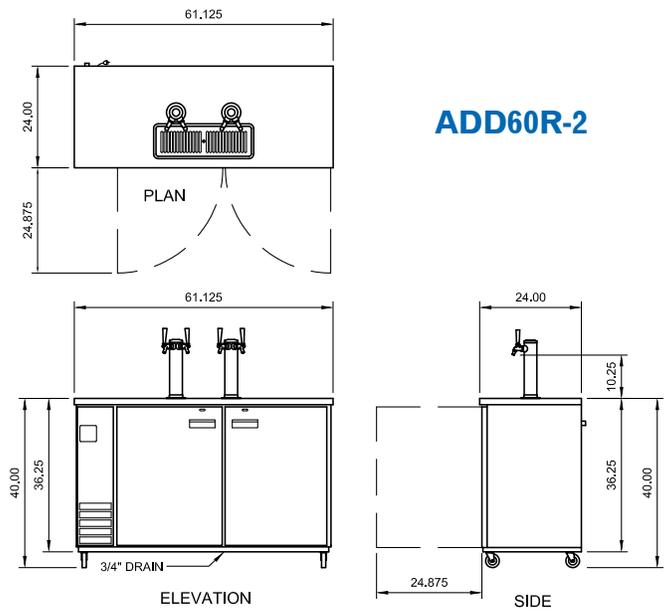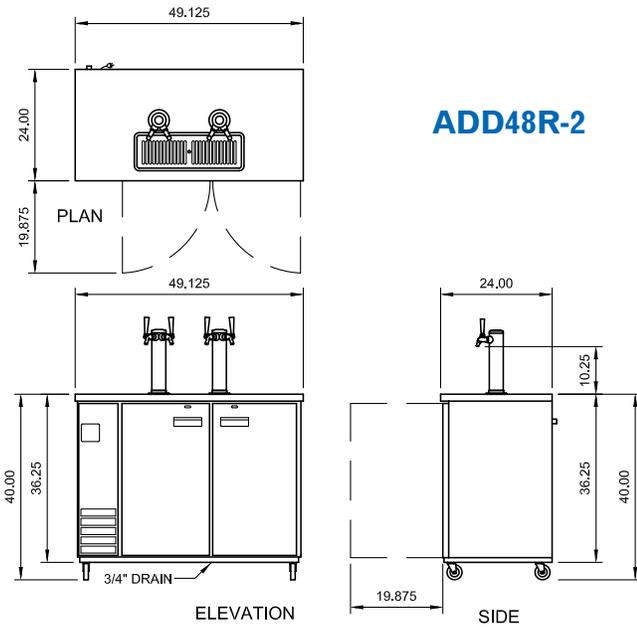

ARCTIC AIR® — A Division of Broich Enterprises, Inc. — An American Company since 1995

