

# STANDARD FFATURES

# **₩ HEAVY DUTY CONSTRUCTION**

Top is made of solid 18" gauge stainless steel, including drip tray(s) for easy cleaning.

Wear-resistant black vinyl exterior, galvanized interior with durable stainless steel floor, and coved corners.

Drain is located in rear of cabinets to keep unit pristine at all times. Ecomate® insulation foamed in place.

#### **₩ POLISHED STAINLESS STEEL TOWERS**

Draft towers are three inches in diameter, stainless steel with polyurethane insulation. The continuous flow of cold air thoughout tower results in a perfect pour Ecomate® insulation foamed in place

#### 

## **₩ STAY OPEN DOORS WITH LOCKS AND LIGHT**

90° Stay open door feature and interior LED light underneath the mullion.

#### **₩ MAGNETIC GASKETS**

Built of one piece, the gasket is removable without tools for ease of cleaning and replacement.

#### **₩ ENHANCED REFRIGERATION SYSTEM**

Factory engineered oversized and balanced refrigeration system. CFC free R-134a refrigerators maintain temperature between 33°F to 38°F, keeping beers ice cold.

## **₩ SIDE MOUNT COMPRESSOR & FRONT BREATHING**

System allows easy service and unrestricted placement of the unit.

# **₩ ANALOG THERMOSTAT**

# **₩ INTERCHANGE DOORS**

Field interchangeable doors from Solid to Glass or Glass to Solid based on operator's needs.

# **₩ GREATER USABLE INTERIOR CAPACITY**

Evaporator located on left side above compressor providing a greater working interior capacity.

# ₩ ADDC-23

Single keg units are rear breathing with internal drain, internal CO2 chain harness and with knockout place for external CO2 placement. Standard with 3"casters.

# OPTIONS (ACCESSORIES

Single / Double draft towers / 3" Rails Casters / 6" Adjustable stainless steel legs / Dunnage floor / 220v-50Hz-1Phase

Stainless Steel Bar Equipment

# **Direct Draw BEER COOLERS**

■ ADDC-23

■ ADDC-58

■ ADDC-68

■ ADDC-78















									`	CATE	47/09 C		
MODEL	DOORS	TOWERS	TAPS	BARRELS	AMPS	НР	VOLTAGE	NEMA PLUG	Cabin L	et Dimensi D*	ons H		pping Cubes
SOLID DOOR													
ADDC-23	1	1	1	1	2.5	1/6	115/60/1	5-15P	24 1/4"	30 1/2"	40 1/8"	165	23
ADDC-58	2	2	3	3	6.6	1/3	115/60/1	5-15P	59 <sup>1/2</sup> "	28"	37"	314	51
ADDC-68	2	2	3	3	6.6	1/3	115/60/1	5-15P	69 <sup>1/2</sup> "	28"	37"	370	59
ADDC-78	3	2	4	4	6.9	1/3	115/20/1	5-15P	80"	28 1/2"	36 <sup>3/4</sup> "	396	68
ADDC-94	3	2	4	5	7.2	1/3	115/60/1	5-15P	95 <sup>1/2</sup> "	28"	37"	409	81


<sup>\*</sup> Depth does not include 1" bumper









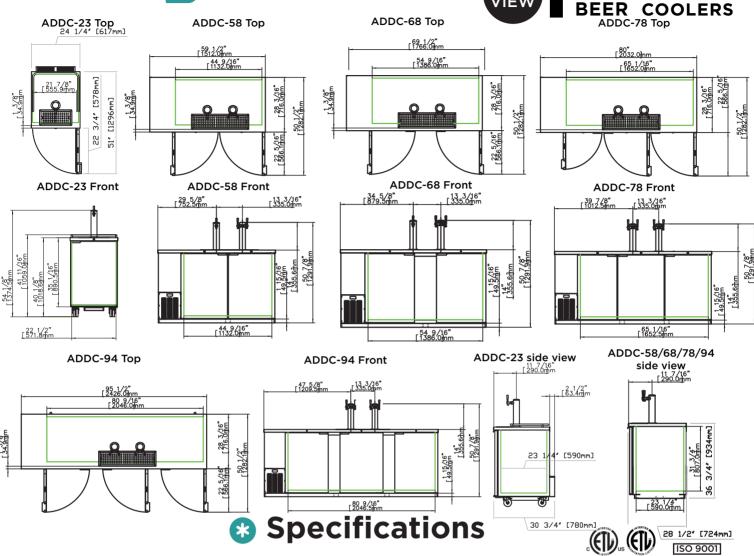

### **4** CONSTRUCTION

- 18 gauge stainless steel top and stylish black vinyl finish front, sides and back. Interior built of galvanized steel walls with coved corner stainless steel floor. Interior LED light.
- The entire cabinet has a 1-1/2" Ecomate® CFC-free, polyurethane insulation foamed-in-place.
- Field interchageable doors with 90° stay open feature and locks standard. One piece magnetic gaskets for easy cleaning.
- ADDC-23 single keg units are rear breathing with internal drain, internal CO2 chain harness and with knockout place for external CO2 placement. Standard with 3"casters.
- Drain is loacted in the back, inside compressor housing.

# **4** REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Self-contained capillary tube system using environtmentallyfriendly and CFC-free refrigerant. R-134a holding temperature at 33°F to 38°F refrigerators.
- Front breathing/side mount compressor for ease of service and placement in narrow spaces. Condensing unit is behind the front grill, slides out for esay cleaning and maintenance.
- Forced air cooling system for faster cooling and constant temperature in the cabinet.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing nesessary.
- Analog thermostat.

### **4** ELECTRICAL

- The whole unit us completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase
- 220V/50Hz/1ph available from factory.

### **4 WARRANTY**

Continental USA & Canada:

- One year labor and parts warranty.
- Five year compressor warranty.
- International: one year parts only.

\* Asber's specification are subject to change without notice as we continue to make product improvements.



