

Glass One Door Refrigerator

Model No.

GR12-HC



GR12-HC

Features:

- HC refrigerant
- Electronic Thermostat and Digital LED Temperature Display
- High Efficiency CFC Free Insulation
- Self-Closing Doors
- Double Pane Glass Doors Remain Open Past 90°
- Low-e Double Pane Glass Doors
- Epoxy Coated Shelves
- INTERIOR: White Powder-Coated Steel
- EXTERIOR: White Powder-Coated Steel
- LED Internal Lamp
- Top Illuminated Top Panel

Serv-Ware GR Series Refrigerators are UL Safety and UL Sanitation Approved.

You will appreciate the attractive professional aesthetics of these units which will add curb appeal to any type of business. Our units are featured with white powder coated steel interior and exterior, double pane glass, self-closing lockable doors, digital controls with a LED readout and foamed in place polyurethane cell insulation. Model GR35-HC is featured with low-e triple pane glass doors. Unit is shipped with wheels installed.

The bottom mounted compressor designed to hold temperatures between 33° F and 41° F.

Warranty Info:

Two Year

- Parts & Labor on entire unit.
- Valid in United States.
- Valid for commercial use only.



Three Year

- Additional Compressor, Part Only.




Conforms to UL471, CSA C22.2 and NSF 7 Standards.

Revised 05/23/2022

GR12-HC

Phone:(800).768.5953
 Fax:(800).976.1299

www.servware.com
 Copyright © 2022 Serv-Ware Products LLC.

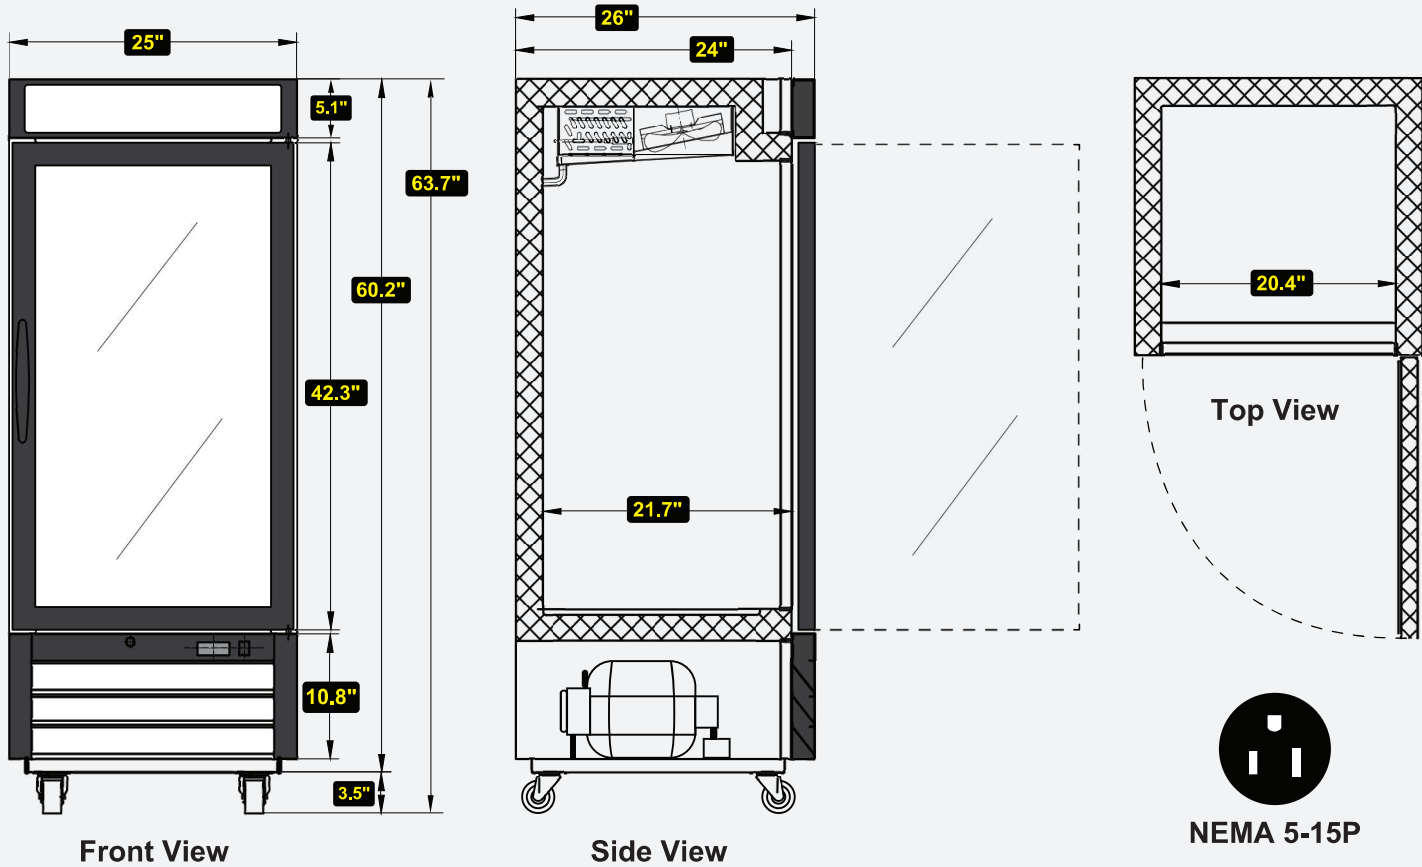

➤ **Technical Information:**

MODEL #	DESCRIPTION	DIMENSIONS (W x D x H)	WEIGHT/LBS. (Shipping)
GR12-HC	1 Door 12 cu. ft. Refrigerator	25" W x 26" D x 63.7" H	250 lbs.

CONSTRUCTION	
Exterior Material	Powder Coated White Steel
Interior Material	Powder Coated White Steel
Insulation Material	CFC Free Foam
Shelf Material	3 Epoxy Coated Wire
Number of Shelves	4 per Door

COOLING	
Temperature Range	33°F – 41°F
Refrigerant+Charge oz.	R290 / 3 oz.
BTU/H	1670
Defrosting	Every 6 Hours
Horse Power	3/8
Storage Capacity	12 cu. ft.

ELECTRICAL	
Voltage	115
Amps	3
Hz	60
Phase	1

ADDITIONAL INFORMATION

*Installation by certified commercial restaurant equipment installer recommended. Inspection before and after installation by licensed electrician for safe operation. Product designed for **commercial interior** usage in a climate controlled location with adequate air circulation and not adjacent to a high temperature source.*



Prop. 65 Warning for California Residents
 WARNING: This product may contain chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.



Phone:(800).768.5953
 Fax:(800).976.1299