



Submittal Sheet

12/02/2023

ITEM# 15 - GRIDDLE, GAS, COUNTERTOP (1 EA REQ'D)

Serv-Ware STGS-12

Griddle, gas, countertop, 3/4" thick griddle plate, (1) H-shaped cast iron burner, thermostatic control, standby pilot, welded stainless steel back & side splash, removable stainless steel drip tray, stainless steel front, sides & adjustable legs, 30,000 BTU, cETLus, ETL-Sanitation (ships natural gas includes LP conversion kit)

ACCESSORIES

Mfr	Qty	Model	Spec
Serv-Ware	1		1 year parts & labor warranty, valid in the United States, standard

GAS

	SIZE	MBTU	KW
1	3/4"	30.0	

STEAM

	INLET SIZE	RETURN SIZE	LB/HR	PSIG (min)	PSIG (max)
1					

Item# _____
 Project: _____
 Qty: _____

Thermostatic Gas Griddles

STGS-12
Not Shown

STGS-24
Not Shown

STGS-48
Not Shown

***STGS-60**
Not Shown



STGS-36

Features

- Cast iron H-shape burners
- 30,000 BTU per burner
- Thermostatic control
- ¾" Thick griddle plate
- 1" Thick griddle plate * (**STGS-60 ONLY!**)
- Fully welded stainless back and side splash
- Standby pilot for quick and easy start
- Removable stainless steel drip tray
- Zinc alloy knob with chrome coating
- Stainless steel adjustable heavy duty legs
- Durable, attractive stainless steel front and sides
- Built for natural gas and supplied with LP conversion kit

One Year - Parts & Labor on entire unit. Valid in United States
 - Valid for commercial use only



Serv-Ware
www.servware.com

Phone:(800).768.5953

Revised 11/19

Fax:(800).976.1299



Intertek



Intertek

Serv-Ware

Item# _____
 Project: _____
 Qty: _____


Thermostatic Griddles

STGS-12
 (Not Shown)

STGS-24
 (Not Shown)

STGS-36
 (Not Shown)

STGS-48

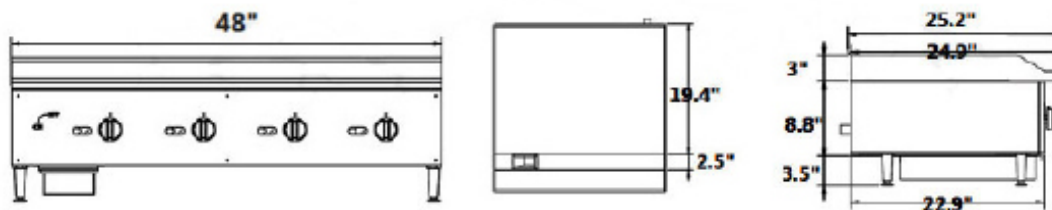

STGS-60

Serv-Ware

Model	Description	Dimensions (W x D x H)	Weight / lbs. (Shipping)
STGS-12	1 Burner	12" x 25.2" x 15.3"	138 lbs.
STGS-24	2 Burner	24" x 25.2" x 15.3"	227 lbs.
STGS-36	3 Burner	36" x 25.2" x 15.3"	315 lbs.
STGS-48	4 Burner	48" x 25.2" x 15.3"	412 lbs.
STGS-60	5 Burner	60" x 25.2" x 15.3"	573 lbs.



Serv-Ware
www.servware.com

Phone:(800).768.5953

Revised 11/19

Fax:(800).976.1299



Intertek



Intertek