

Project Name	Location	Item #	Quantity	Model #	AIA #	SIS #
--------------	----------	--------	----------	---------	-------	-------

**FEATURES**

- R290 Hydrocarbon refrigerant.
- Maintains temperature of 35°F (1.7°C).
- Exterior: Black powder coated cold rolled steel with stainless steel countertop.
- Interior: Stainless steel floor with heavy gauge galvanized steel walls.
- Each Door fitted with black flat top door handles.
- True's self-cleaning RCU technology eliminates the need to clean the condenser coil, reduces energy consumption and helps maintain the coldest temperatures and freshest product.
- LED interior lighting.
- NSF/ANSI Standard 7 compliant for the storage and/or display of packaged or bottled product.
- Recommended 1" clearance side and back
- UL Rated for outdoor use.



**ROUGH-IN DATA**

Specifications subject to change without notice. Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

Model	Doors	Shelves	Capacity		Cabinet Dimensions (inches) (mm)			115V/60/1 Voltage		Cord Length† (total ft.) (total m)	Crated Weight (lbs.) (kg)			
			12 oz. Cans	1/2 Barrels	W	D†	H*	HP	Amps			NEMA		
TBB24-60-2G-Z1-SFT-B-1	2	4	89 6-pks	57 6-pks	2	2	60 1/8	24 7/8	34 3/4	1/4	3.2	5-15P	10	345
							1525	632	882				3.04	167

† Depth does not include 1 1/2" (12 mm) for door handles. \*Height does not include 1/4" (7 mm) for leg levelers.  
 ‡ Cord length listed represents usable cord length.

Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



115/60/1  
NEMA-5-15R

APPROVALS

AVAILABLE AT



**ADDITIONAL FEATURES**

**Refrigeration System**

- Factory engineered, self-contained, capillary tube system.
- Environmentally friendly R290 hydrocarbon refrigerant.
- Forced air refrigeration system which maintains 35°F (1.7°C) product temperature.
- True's self-cleaning RCU technology eliminates the need to clean the condenser coil, reduces energy consumption and helps maintain the coldest temperatures and freshest product.

**Cabinet Construction**

- Exterior: Black, powder coated cold-rolled steel with stainless steel countertop.
- Interior: Stainless steel floor with heavy gauge galvanized steel walls.
- Insulation: Entire cabinet is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion and zero global warming potential.
- Base fitted with leg levelers.

**Doors**

- Low-E, double pane thermal insulated glass doors with black powder coated door frames.
- Each Door fitted with black flat top door handles.
- Door locks standard.

**Shelving**

- Four (4) adjustable, gray PVC coated wire shelves. 21<sup>11</sup>/<sub>16</sub>" W x 18" D (551 mm x 458 mm). Four (4) chrome plated shelf clips included per shelf.
- Aluminum shelf support pilasters. Shelves are adjustable on 1/2" (13 mm) increments.

**Model Features**

- NSF/ANSI Standard 7 compliant for the storage and/or display of packaged or bottled product.
- Electronic control.
- UL approved for outdoor use.

**Electrical**

- Unit completely pre-wired at factory and ready for final

connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.


**Optional Features/Accessories**

(upcharge and lead times may apply)


- Castors 7/8" (23mm), 2"D (51mm), 3"D (77mm), 4"D (102mm), 5"D (127mm) castors
- 6"H (153mm) legs
- 6"H (153mm) seismic legs
- Additional shelves
- One liter or wine bottle organizers
- Bottle Organizers (available in black or gray)

**PLAN VIEWS**


**Plan View Notes:** Dimensions in brackets are in millimeters. • Height does not include 1/4" (7 mm) for leg levelers. • Depth does not include 1 1/2" (12 mm) for door handles.

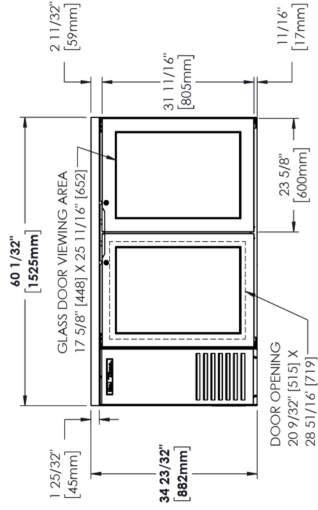


**FRONT VIEW**



**SIDE VIEW**

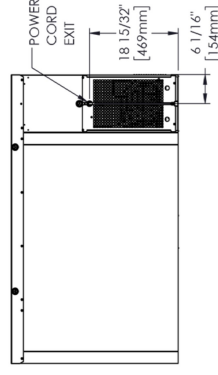

**BACK VIEW**

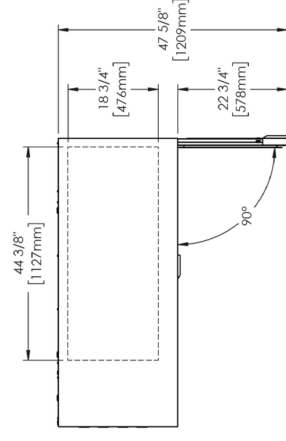

**TOP VIEW**