



# KMD-860M\_J(Z)

MODULAR CRESCENT CUBER



KMD-860M\_J(Z)  
07/02/24  
Item # 13232

W x D x H  
30" x 24<sup>5/8</sup>" x 28"

## KM|EDGE™

**KMD-860MAJ**  
Air-Cooled  
Shown on optional  
Lancer 30" dispenser


**KMD-860MWJ**  
Water-Cooled


**KMD-860MRJZ**  
Remote Air-Cooled



Item #: \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_  
AIA#: \_\_\_\_\_

## Features

- ▶ Individual crescent cube
- ▶ Stainless steel evaporator
- ▶ CycleSaver™ design 

- Up to 967 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- EverCheck™ alert system 
- Removable air filters
- R-404A Refrigerant

### Available on Bins:

**B-250SF B-700SF B-900SF B-1300SS B-1650SS\***  
**BD-500SF B-800SF B-1150SS B-1500SS\***

*Top kit may be required. See Bin Spec Sheets. \*Two unit application only.*

### Warranty:


3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator.  
5 Year Parts on Compressor; air-cooled condenser coil.  
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping: (LxWxH) 33<sup>1/2</sup>" x 33<sup>1/4</sup>" x 28" Volume: 18.05ft<sup>3</sup>

Condenser	Model	ICE PRODUCTION		WATER USAGE		ELECTRICAL						
		Air / Water Temp Lbs. per 24 hours 70°/ 50°F 90°/ 70°F	Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Min. Circuit/ Max. Fuse Size	Amperage	Voltage	Circuit Wires (including ground)	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
Air	KMD-860MAJ	855 665	30.0	N/A	5.16	20A	9.9A	208-230V/60/1	3	13,100	2 lbs. 6.8 oz.	218 / 248
Water	KMD-860MWJ	940 862	20.5	139	3.90	20A	8.5A	208-230V/60/1	3	11,000	1 lb. 12.2 oz.	228 / 258
Remote	KMD-860MRJZ	967 850	18.2	N/A	5.05	20A	12.5A	208-230V/60/1	3	13,000	5 lbs. 15.9 oz. 9 lbs. 14.7 oz.*	226 / 256

\*(with condenser)

## KMEdge™ Cube Dimensions\*



\* approximate size in inches, image not to scale

## Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 187 - 253V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

## Service

- Panels easily removed and all components accessible for service.
- Allow 6" (15cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance/ service.

## Plumbing

- Icemaker Water Supply Line: Min. 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Min. 3/4" Nominal ID Hard Pipe or Equivalent
- Water-Cooled Model (Lines Must Be Independent of Icemaker)
- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

## Water Filter

Please refer to water filter specification sheet for recommendations.

*Hoshizaki reserves the right to change specifications without notice.*



# KMD-860M\_J(Z)

## MODULAR CRESCENT CUBER






KMD-860M\_J(Z)




07/02/24

Item # 13232




FRONT VIEW

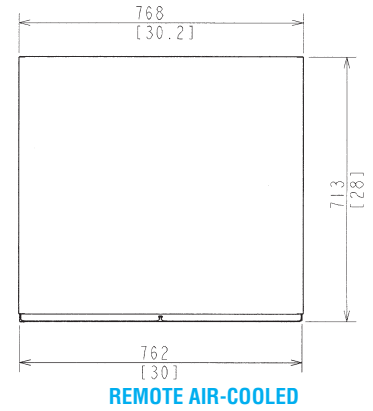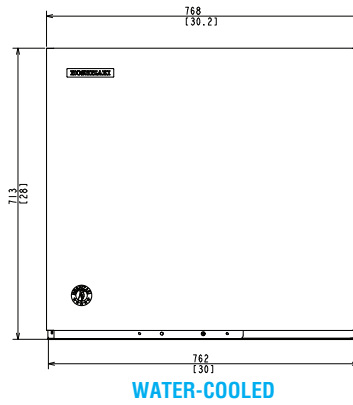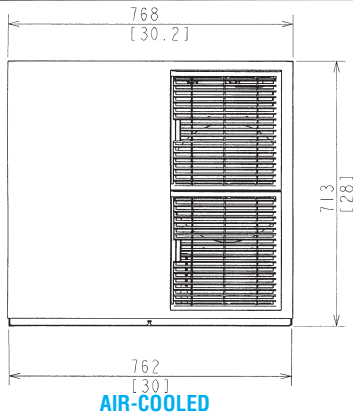




SIDE VIEW

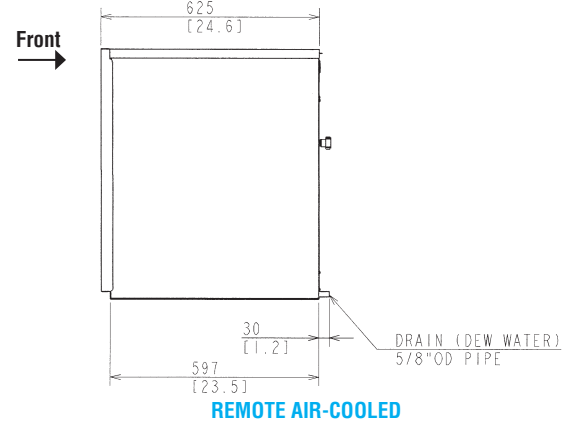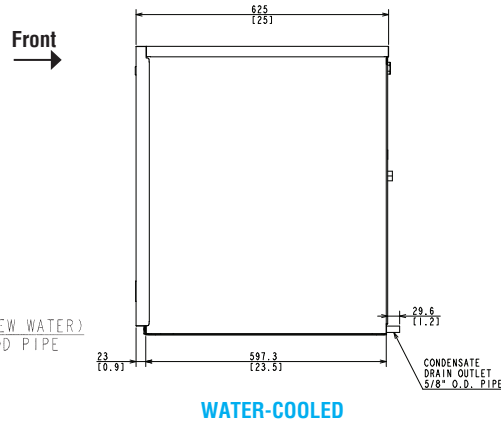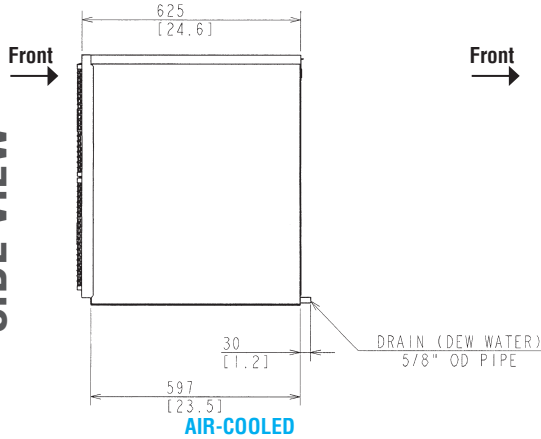

REAR VIEW

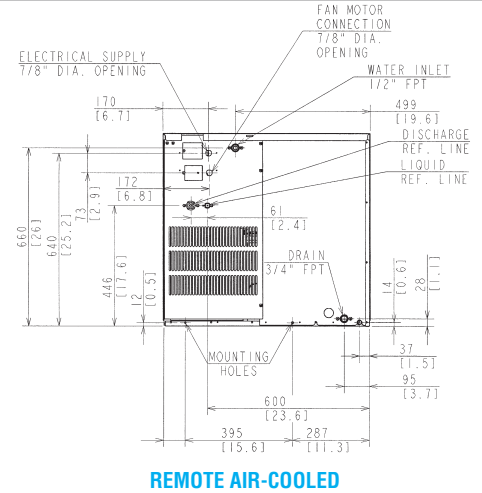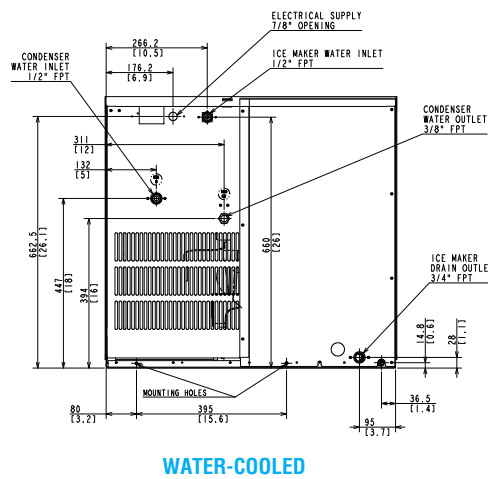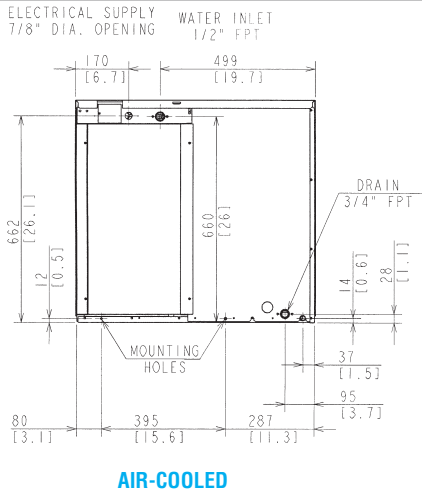

BOTTOM VIEW



URC-9FZ Remote Condenser (Sold Separately)  
(W x D x H) 35 11/16 x 14 1/16 x 36 1/2  
For Use with KMD-860MRJZ

Brazed Line Sets  
(Sold Separately)  
25' HS-5604  
35' HS-5605  
55' HS-5606  
Voltage supply for the  
URC Remote Condenser  
is supplied from the Ice  
Maker. No additional  
circuit is required.

